
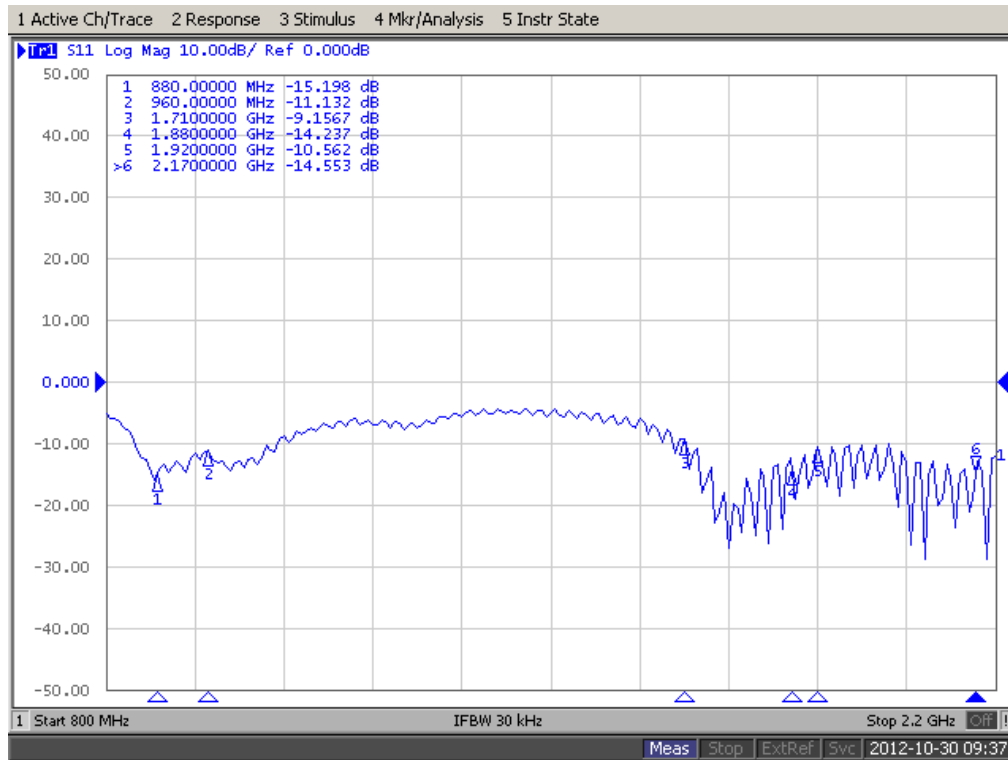


GSM/UMTS-Stationsantenne mit SMA-Connector



Technical Data - Artikel A10012		
Omnidirectional GSM/UMTS dipole antenna		
GSM	Frequency Range	GSM: 824 - 960 MHz DCS-PCS: 1710 -1990 MHz GPRS: 1900 MHz UMTS: 1920 – 2170 MHz
	VSWR	< 2.2
	Gain	2.14 dBi
	Power Max.	20 W
	Impedance	50 Ω
	Polarization	vertical
	Emission	Omnidirectional
Mechanical Data		
	Dimensions (ØxH)	ca. 20 mm x 270 mm
	Cable	ca. 5.0 m, RG58
	Connector	SMA (m) 
	Temperature range	-30°C .. +80°C
	Weight	360 g
	Colour	Black (white on request)
	RoHS compliant	

Log Mag



SWR

