


UMTS-Stationsantenne



Antenne 425				
Technical Data				
LTE 800	GSM 900	GSM 1800, UMTS	WLAN	LTE 2600
790-862 MHz	890-960 MHz	1710-2170 MHz	2400-2485 MHz	2500-2690 MHz
VSWR			≤ 1,9 : 1	
Gain			≈ 2 dBi	
Impedance			50 Ω	
Return loss			> 10 dB	
Polarization			vertical	
Mechanical Data				
Dimensions (∅xL)			ca. 25 mm x 193 mm	
Connecting cable			Low Loss	
Connection variants:		425	3 m SMA (m)	
		425-10m	10 m SMA (m)	
		425-20m	20 m SMA (m)	

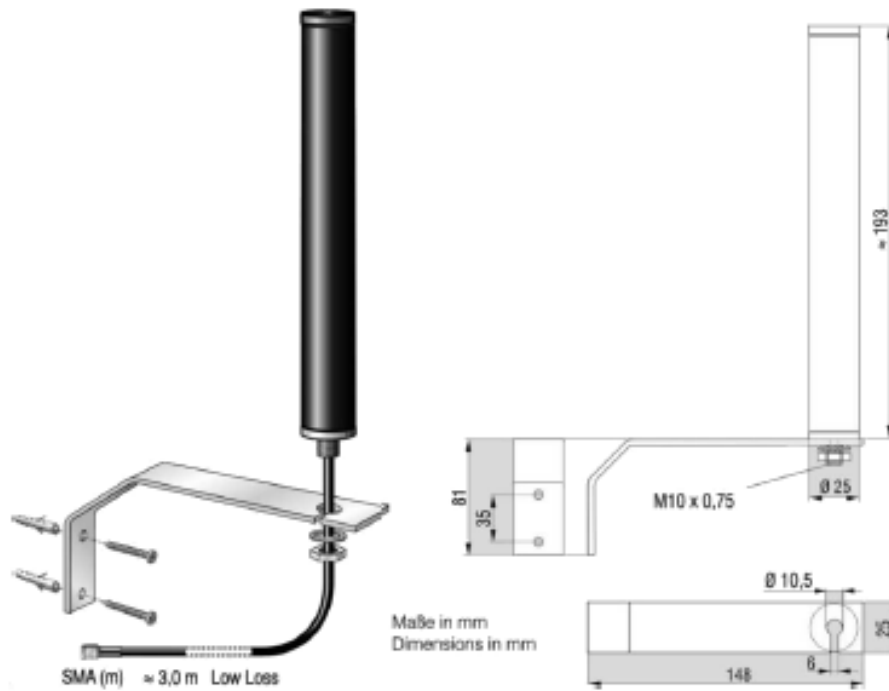

Return Loss:

